

# NEC ME & MC Series

Versatile projectors ideal for K12 classrooms





# Flexible classroom projectors offer powerful performance, low maintenance and low cost.

Easy to use and at the right price, ME and MC Series projectors provide all the essential features that you need for brilliant display in classrooms and meeting rooms while providing low cost of ownership with minimal maintenance.



**LONG LAMP LIFE**  
10,000 normal / 15,000 eco


## Essential Features for Educational Facilities

- Featuring XGA, WXGA and WUXGA native resolutions, brightness up to 4000 lumens and patented NEC technologies, ME and MC Series LCD projectors display impressive images and videos
- Powerful 16-watt speaker provides volume needed for typical classrooms
- Plug-and-Play intuitive setup and operation
- Variable audio control of external speakers using the projectors remote control
- Sufficient connections for multiple sources with Dual HDMI inputs, computer, video and monitor loophrough
- Keystone correction technology ensures a square image even when the projector is set up at a steep offset angle to the screen
- AutoSense™ intuitively syncs the projector with most computer signals and features one-touch image optimization
- One-touch source changes and complete menu control using the projector keypad
- Wall Color Correction for vivid images even without a screen

## DLow Maintenance Environmental Design

- Extended lamp life with ECO Mode™ technology increases lamp life up to 15,000 hours, while lowering power consumption
- Power management enables projector to automatically turn off when an incoming signal is not detected from any of the inputs
- Auto Power On when a signal is detected from a computer
- Carbon savings meter calculates the positive effects of operating the projector in ECO Mode, which is encouraged by an optional message at startup. A green ECO Mode button on the remote control makes the switch easy.
- Quick start (3 to 4 seconds) lets you begin presenting in seconds
- Sleep timer can be set to automatically turn off the projector at set countdown times
- Low power consumption (0.5W in stand-by mode) minimizes energy costs

## Zoom Lens Comparison

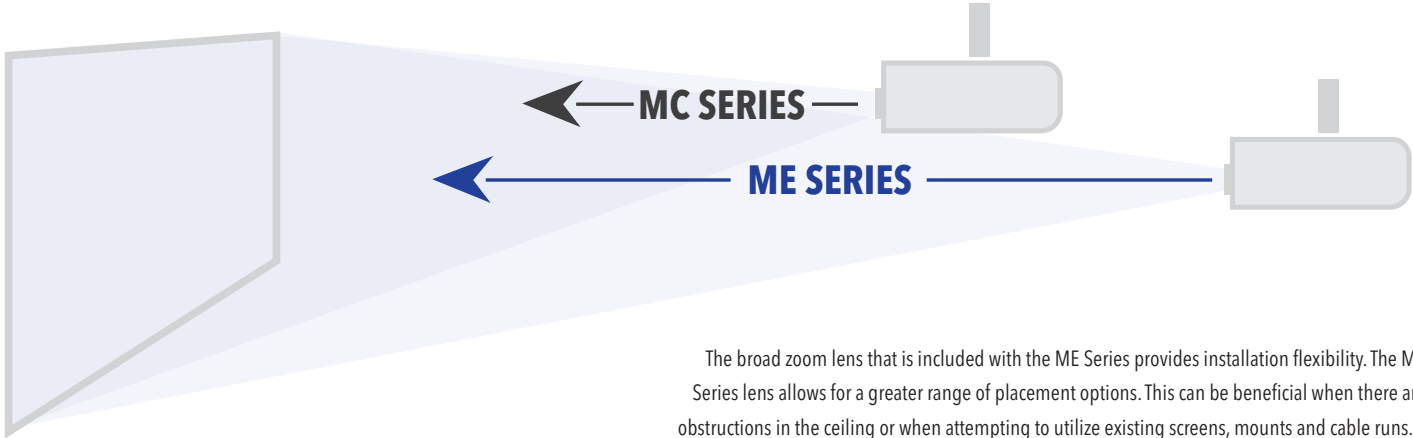

The broad zoom lens that is included with the ME Series provides installation flexibility. The ME Series lens allows for a greater range of placement options. This can be beneficial when there are obstructions in the ceiling or when attempting to utilize existing screens, mounts and cable runs. A broad zoom lens can reduce installation costs and ensure sharp images that fill the screen properly.

## Advanced Functions

### MultiPresenter


MultiPresenter is application software that lets you display your device's screen (PC, tablet, smart phone, etc.) on the receiver projectors via wired or wireless LAN. MultiPresenter is free and available on Windows, Mac, iOS, and Android. MultiPresenter can send images from your various devices, which enables you to display real-time images with the internal camera or web pages on the smart devices in combination with a file sharing application.



#### Desktop Version (Win/Mac)

Computer audio and video data (audio can be transmitted only when using Windows) can be transmitted via a wireless or wired LAN.


- **Easy Connection**  
Input a 4-digit number (PIN code) for a network connection via wireless LAN.
- **Multiple devices (maximum of 16 screens) can display at the same time and simultaneously display onto multiple receiving projectors.**
- **Projector control**

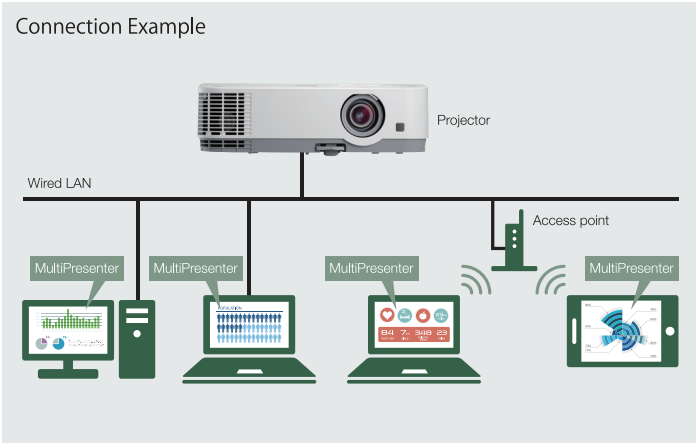

#### Mobile Version (Android/iOS)

You can transmit files, photos, camera images, files of web pages, and other information stored on Android or iOS devices via a wireless LAN.

- **Easy Connection**  
Input a 4-digit number (PIN code) for a network connection via wireless LAN.
- **Multiple devices (maximum of 16 screens) can display at the same time and simultaneously display onto multiple receiving projectors.**
- **Projector control**

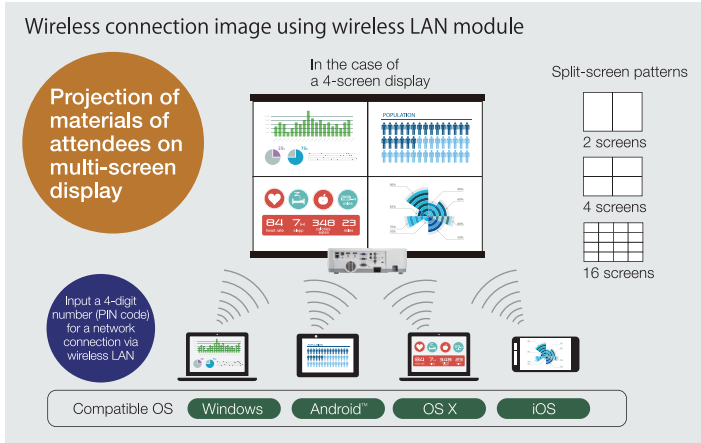

		MC372X	MC382W	ME402X	ME372W	ME382U
Display Technology		0.63" LCD	0.64" LCD	0.63" LCD	0.64" LCD	0.64" LCD
Light Output (lumens)	ECO mode off	3700	3800	4000	3700	3800
	Normal ECO mode	Approximately 80%				
	ECO mode	Approximately 67%				
Resolution	Center	3800	4100	4100	4000	3900
	Native	XGA 1024 x 768	WXGA 1280 x 800	XGA 1024 x 768	WXGA 1280 x 800	WUXGA 1920 x 1200
Contrast Ratio (up to)	Maximum	Up to 4K@30Hz (3840x2160) with Advanced AccuBlend, Pixel clock frequency: less than 300MHz				
Light Source (lamp)	ECO mode off	16,000:1 with Iris				
	Normal ECO mode	225W				
	ECO mode	180W				
Lamp Life (up to)*	ECO mode off	151W				
	Normal ECO mode	10,000 hours				
	ECO mode	12,000 hours				
Screen Size (diagonal)		30 - 300 in. / 0.76 - 7.62m				
Projection Distance		2.9 - 35.9 ft. / 0.9 - 10.9 m		2.6 - 42.3 ft. / 0.8 - 12.9 m		
Projection Angle		0 - 9° tele / 0 - 10° wide (at 60°)		0 - 7° tele / 0 - 11° wide (at 60°)		
Lens	Zoom	Manual				
	Zoom Ratio	1.2x		1.7x		1.6x
	Throw Ratio	1.5 - 1.8:1	1.4 - 1.6:1	1.3 - 2.2:1	1.2 - 2.1:1	1.2 - 2.0:1
	Focus	Manual				
	F-number, f-number	F=1.6~1.76 / f=19.158~23.018mm		F=1.7~2.2 / f=17.4~29mm		F=1.5~2.08 / f=17.2~27.7mm
Keystone Correction	Horizontal	Manual: +/- 30°				
	Vertical	Manual: +/- 30°				
Synchronization Range	Horizontal	15-100kHz (RGB: 24kHz or over)				
	Vertical	50-120Hz				
Supported Video Standards		NTSC3.58/NTSC4.43/PAL/PAL-N/PAL-M/PAL-60/SECAM				
Horizontal Resolution	Video	540 TV Lines (NTSC/PAL), 300 TV Lines (SECAM)				
Macintosh Compatibility	YCbCr	Max. 768 TV Lines				
Input Terminals	RGB1 (analog)	VGA 15pin D-Sub				
	RGB2 (digital)	HDMI (w/HDCP)				
	RGB3 (digital)	HDMI (w/HDCP)				
	Video	RCA				
	Audio1	Stereo Mini Jack				
	Audio2	RCA (L/R)				
	USB Type A	Wireless LAN (optional), Memory, (1.0A)				
	USB Type B	USB Display, Service				
Output Terminals	Monitor Out	VGA 15pin D-Sub				
	Audio Out	Stereo Mini Jack				
Wired LAN port		RJ45 (100Base-TX/10Base-T)				
External Control		RS232 (D-Sub 9pin), IR, RJ45				
Built-in Speaker		16W (mono)				
Power Requirements		100 - 240V AC, 50/60Hz				
Input Current		3.3-1.3A				3.4-1.4A
Power Consumption	ECO mode off	267W		288W		295W
	Normal ECO mode	228W		229W		238W
	ECO mode	196W		196W		207W
	Standby (network)	2.0W or less				
	Standby (normal)	0.5W or less				
Installation Orientation		Floor/Front, Floor/Rear, Ceiling/Front, Ceiling/Rear				
Dimensions (WxDxH)		13.6 x 10.3 x 4.1 in. (345 x 261 x 104.6 mm)				13.6 x 11.2 x 4.3 in. (345 x 284.5 x 108.4 mm)
Net Weight		7.1 lbs. (3.2 kg)				7.7 lbs. (3.5 kg)
Carton		17.7 x 15.4 x 7.8 in. (450 x 390 x 200 mm)				17.7 x 15.4 x 7.8 in. (450 x 390 x 200 mm)
Gross Weight		10.4 lbs. (4.7 kg)				11.0 lbs. (5.0 kg)
Fan Noise		37 dB ECO mode off / 34 dB Normal ECO / 29 dB ECO mode				
Regulations		USA: UL (UL60950-1/UL62368-1) FCC Part 15 Class B, Canada: C-UL (CSA60950-1) ICES-003 Class B, NOM				
Operating Temperature		41° - 104°F / 5° - 40°C				
Humidity		20-80% non-condensing				
Storage		14° - 122°F / -10° - 50°C				

\*Not the warranty period. Repair/replacement may be required sooner. - Additional accessories are available, including screens, carts, mount accessories and replacement cables. Visit [www.necdisplay.com](http://www.necdisplay.com) for details.

## UNIQUE FEATURES

**Advanced AccuBlend™** ensures detailed images when non-native resolution sources are connected to the projector

**Quick start and direct power off** improve efficiency and auto power options can lower power consumption

**Enhanced security settings** help prevent unauthorized access, image adjustments and theft

**Improved MultiPresenter function** allows easy image sharing from a computer or mobile device via the network

## WARRANTY

Registered owners receive a 3 year parts and labor warranty including InstaCare next business day exchange. The lamp is covered for one year or 1,000 hours, whichever comes first.

## SHIPS WITH

Remote control, batteries, power cord, RGB signal cable, user's manual on CD-ROM, quick start guide, and product registration card

## ORDERING MODEL NUMBERS

NP-ME402X NP-MC372X NP-ME372W NP-MC382W NP-ME382U

## Accessories

- NP47LP Replacement Lamp
- RMT-PJ39 Replacement Remote Control
- NP05LM1 802.11b/g/n Wireless LAN Adapter
- MP300CM Ceiling mount
- SCP200 Adjustable suspended ceiling plate for use with ceiling mount
- PWRCRD-V70 Power Cord
- RGBCBL-PJPX RGB Signal Cable
- NECEW4YR-ME Extends term of parts and labor warranty to 4 years including InstaCare
- NECEWSYR-ME Extends term of parts and labor warranty to 5 years including InstaCare



Advanced AccuBlend, ECO Mode and Virtual Remote are trademarks of NEC Display Solutions. HDMI, the HDMI Interface are trademarks or registered trademarks of HDMI Licensing LLC. All other brand or product names are the respective holders. Product specifications subject to change.

**PRÉSENCE**  
www.presence.qc.ca  
418.681.2470

