

# UNITE® 60 4K Camera



Combine 120-degree field-of-view and AI tracking with your own choice of mic and speaker to enjoy an exceptional collaboration experience.

- > 4K video, auto-focus, and 3X digital zoom.
- > 120° ultra-wide-angle field-of-view
- > Full-function USB 3.0 interface for video and power
- > Super-high SNR with advanced 2D and 3D noise reduction
- > Wide dynamic range support for optimal image capture.
- > Control the camera's functions via IR remote or UVC protocol.
- > Compatible with popular applications such as Microsoft® Teams, Zoom™, WebEx™, Google® Meet™, and more.

### APPLICATIONS:

- PC-Based Video Conferencing
- Web Conferencing
- Unified Communications

### WORKSPACES:

- Huddle Spaces
- Small Meeting Rooms
- Executive Offices



### Smart Face or Voice Tracking

AI processing optionally tracks an individual or frames an entire group for perfect framing and focus.



### Easy to Install



Easily mounted on monitors using standard damping rotary-shaft support.

*Elevate Your Collaboration*

### Different Tracking Modes

#### Track Participants

Detects all the attendees that the camera has access to and captures them so that they all fit in the video frame.

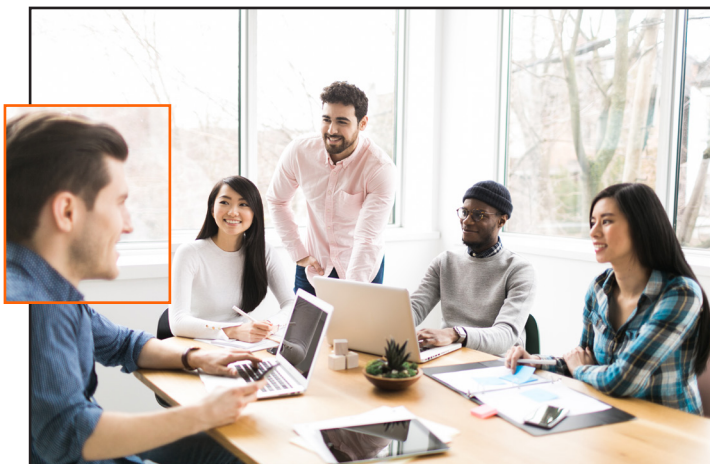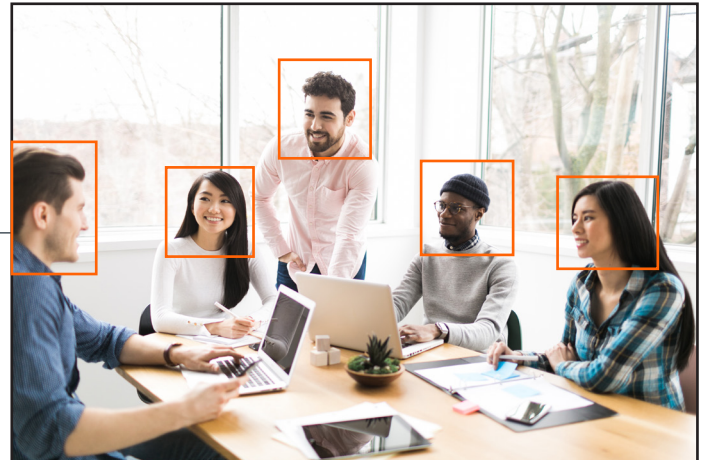


#### Track Speaker

Detects the person who is speaking and follows that person as they move. Keeps the speaker centered in the video frame.

#### Track Person

Ideal to follow only the person who is moving. The moving person being tracked doesn't have to be the speaker.

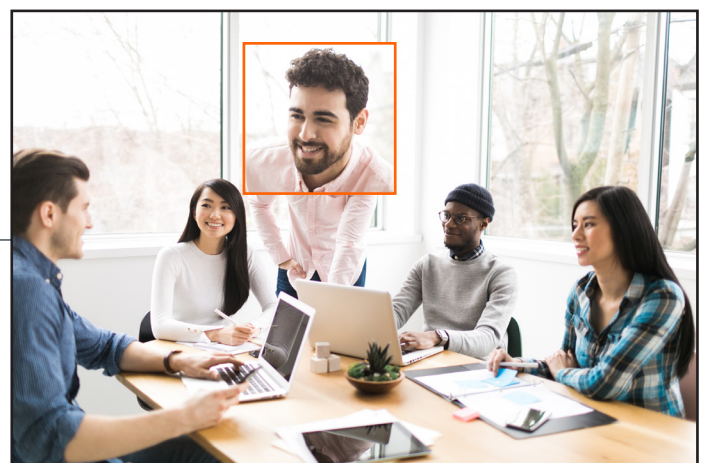

# UNITE® 60 4K Camera

### Camera

- Video System: 4K: downward compatible with 1080p30 and 720p
- Sensor: 1/2.5", CMOS
- Effective Pixels: 8.29M
- Scanning Mode: Progressive
- Lens: Focus: f=2.8mm, FOV: 120°
- Focus Mode: Auto Focus
- Minimal Illumination: 0.05 Lux @ (F1.8, AGC ON)
- Shutter: 1/30s–1/10000s
- White Balance: Auto, Indoor, Outdoor, One Push, Manual
- Backlight Compensation: Supported
- Digital Noise Reduction: 2D & 3D Digital Noise Reduction
- Horizontal Angle of View: Wide angle up to 120°
- Electronic Pan Tilt Zoom
- Easy Installation: Equipped with damping rotary shaft bracket to fit almost any display, easy to install, stable and reliable

### Audio

- Built-in microphone array

### USB Features

- Operating Systems: Windows 7 or above
- Video Formats: 4K30, 1080p30, 1080p25, 720p30, 720p25, 960x540p30, 960x540p25, 640x360p30, 640x360p25, etc
- USB Video Communication: UVC 1.0 /1.1
- UVC PTZ: Supported

### Input/Output Interface

- USB Interface: 1 x USB3.0: Type B female

### Generic Specifications

- Input Voltage: 5v (USB power supply)
- Current Consumption: 600 mA
- Power Consumption: 3.0 W
- Operating Temperature: 14°F–104°F (-10°C – 40°C)
- Storage Temperature: -40°F – 140°F (-40°C – 60°C)
- MTBF: >30000 h
- Weight: 0.74 lb (0.34 kg)
- Part Number: 910-2100-009



## SALES AND INQUIRIES

### Headquarters

5225 Wiley Post Way  
Suite 500  
Salt Lake City, UT 84116

### US & Canada

Tel: 801.975.7200

### International

Tel: +1.801.975.7200

### Sales

Tel: 801.975.7200  
sales@clearone.com

### TechSupport

Tel: 801.974.3760  
videotechsupport@clearone.com