



VIEWBOARD

# ViewBoard IFP86G1


## Key Features

- Bring Your Own Device interactive display for versatile use in any scenario
- Upgradable framework for enhanced versatility and prolonged longevity
- Seamless USB-C plug-and-play connectivity with 65W power charging for convenient presentations
- Flexible integration with slot-in PCs, supporting Windows, Linux, and EDLA



## Product Description

Transform teamwork and efficiency with the ViewBoard Genesis Series of Bring Your Own Device interactive displays. Boasting an upgradable framework, this series ensures versatility by seamlessly integrating with slot-in PCs across EDLA, Windows, and Linux operating systems. Through these integrations, it enables access to Google Workspace and Microsoft 365 productivity suites to elevate workspace dynamics. This versatility extends to its USB-C plug-and-play connectivity, enabling instant and fluid presentations from connected devices, regardless of their platform. Prioritizing productivity and peace of mind, the series emphasizes data security, ensuring sensitive information remains securely stored on connected devices for workflows that are truly safe and efficient.

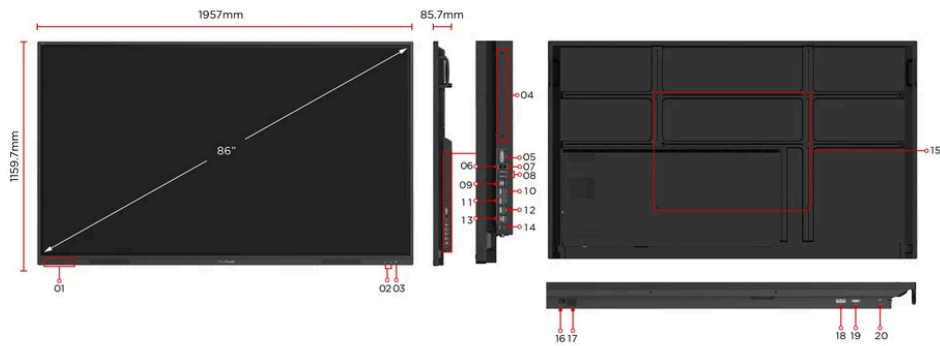

- |                  |                |                                  |
|------------------|----------------|----------------------------------|
| 1. Menu Controls | 8. USB 3.0 X 2 | 15. VESA® Wall Mount 600 x 200mm |
| 2. USB 3.0 X 2   | 9. Touch 1     | 16. Power On/OFF                 |
| 3. USB 2.0       | 10. HDMI 1     | 17. AC IN                        |
| 4. OPS Slot      | 11. HDMI 2     | 18. LAN                          |

5. VGA  
6. Audio In  
7. Audio Out

12. HDMI 3  
13. Touch 2  
14. USB Type-C

19. RS232  
20. USB 2.0(FW update)

---

**Visit Us**

[www.viewsonic.com](http://www.viewsonic.com)

**DISPLAY**

Panel Size:	86"
Panel Type:	TFT LCD Module with DLED Backlight.
Display Area (mm):	1895.04 (H) X 1065.96 (V)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160
Colors:	1.07G
Brightness:	400 nits (typ.)
Contrast Ratio:	4000:1 (typ.) 6000:1 (DCR)
Response Time:	8ms
Viewing Angles:	H = 178, V = 178 typ.
Backlight Life:	50,000 hours (Typ)
Surface Treatment:	Hardness: 9H, Anti-glare coating
Bezel:	Slim
Orientation:	Landscape

**TOUCH**

Type/ Tech:	Ultra Fine Touch Technology (IR Recognition)
Touch Resolution:	32767 × 32767
Touch Point:	Windows: 40 points of touch, Android : 20 points of touch

**INPUT**

HDMI:	Rear 2.0 x 3 (HDMI 1 & 3 Support CEC; HDMI 2 Supports CEC & ARC)
RGB / VGA:	x1
Audio:	x1
RS232:	x1
OPS:	x1

**OUTPUT**

Audio:	x1
--------	----

**LAN**

RJ45:	1 in 1 out
-------	------------

**USB**

Type A:	Front x3(USB2.0x1, USB3.0x2) Rear x3(USB3.0x2, 2.0 x1 for FW update)
Type B:	Rear x2 (USB 3.0x2)
Type C:	x1 ( DP 1.2, Touch, Data Sharing, PD65W, Ethernet 10M/100M)

**SPEAKERS**

10W x 2
---------

**TOP CAMERA PLATE**

Yes
-----

**COMPATIBILITY**

HDMI:	3840x2160 @ 60Hz
-------	------------------

**POWER**

Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	On:154.89W Off mode <0.5W

**ERGONOMICS**

Wall Mount (VESA®) :	800mm x 600mm
----------------------	---------------

**OPERATING CONDITIONS**

Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH non-condensing

**DIMENSIONS (W X H X D)**

Physical (inch / mm):	77 x 45.7 x 3.4 in / 1957 x 1160 x 85.7 mm
Packaging (inch / mm):	83.1 x 50.5 x 8.9 in / 2110 x 1283 x 225 mm

**WEIGHT**

Net (lb / kg):	137.46lb/62.35kg
Gross (lb / kg):	164.58lb/74.65kg

**REGULATIONS**

US NRTL w/ CA,FCC/ICES003, DOE Energy Star,DOE EPEAT, CE EMC, LVD or CB, RoHS Green BOM & RoHS DoC, ErP, REACH SVHC List & DoC, EEL, WEEE,GOST-R / EAC, FF,LBL, ErP-Eco,SCIP,Annex I,Annex II,TPCH DoC,Packing waste,CA65 DoC

**PACKAGE CONTENTS**

1. 3m power cable
2. HDMI 2.0 cable 3m x 1 (HDMI LA certified)
3. Remote control with AAA battery (Opt.)
4. 3m USB 2.0 touch cable x 1
5. Touch pen (Passive pen) x 2 (VB-PEN-002)
6. Quick Start Guide + Compliance Statement
7. RS232 adapter
8. Screw (wall mount 4)
9. Camera Plate

**COMPATIBLE SLOT-IN PC**

Configurable OS, Windows, Google EDLA ; VPC-A31-O1/VPC33 series/VPC35 series/VPC37 series

**SPECIAL FEATURES**

All-in-one USB port:	"SmartPort™ USB" to all channels.
Simple LAN sharing between IFP and slot-in device:	10/100/1000M (USB Type-C 10M/100M, OPS 1000M)
Light Sensor:	Yes

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.