UHD Commercial TV with Essential Smart Function

Commercial TV | UT640S Series (NA)

The UT640S Series is specifically designed for diverse business environments. By providing compatibility with AV Control systems and DPM (Display Power Management) as well as its smart connectivity, simple user friendly interface, and UHD picture quality, the UT640S series enhances ease of use while facilitating communications between businesses and their target audiences.



Simple Content Management



Higher Visibility



Better Usability





Embedded Content & Group Management

The embedded Content and Group Management System allows you to edit and play content, schedule playlists and groups, and control Signage via remote control, mouse and mobile phone without the use of separate PC or software. This makes content management much easier and more user-friendly.

SuperSign Control

SuperSign Control is the basic control software, and it can manage up to 100 displays through a single account and server. Power, volume, and scheduling can be remotely adjusted, and firmware updates supported.

USB Data Cloning

USB data cloning increases efficiency in managing multiple displays for optimal operation since users don't have to set up each display one by one. Once users copy data to a USB device in one display, it can be easily distributed to the other displays through a USB plug-in.





may differ.

* All displays must be connected to the same network.





Real-Time Remote Monitoring

 $\label{lem:maltinctions} Malfunctions or errors can be easily handled through real-time remote care. When an error occurs, notifications can be sent through the SNMP (Simple Network Management Protocol) protocol.$

WOL(Wake-on-LAN)

WOL (Wake-on-LAN) enables users to turn on displays by sending the relevent packet through a network.



Power

Data


True Color, Immersive View

The UT640S series is large in size to enhance the visibility of content and captivate viewers. The LG IPS panel provides a wide range of viewing angles so that content can be clearly seen, regardless of the viewer's position. Each pixel in the IPS panel reproduces true-to-life colors without distorting images.



Perfect Picture Quality and Color

Enjoy Full HD content in 4K ULTRA HD quality, optimized by the 4K Upscaler. The 4K upscaler automatically upgrades Full HD content to ULTRA HD through several upscaling processes so that images look crisp and clear in any viewing situation. This LG TV can also express intense highlights, vivid colors, and deep black hues on the screen through HDR10.

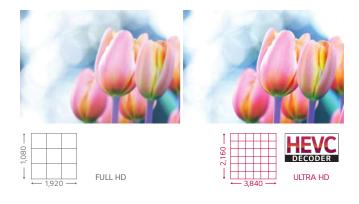

Compatibility with AV Control Systems

The UT 640S series has been certified Crestron Connected®, proving that it has a higher level of compatibility with professional AV controls. This results in seamless integration and automated control*, boosting business management efficiency.


DPM (Display Power Management)

Display Power Management (DPM) can be configured to be On only when there is a TV signal present to manage power more efficiently.



* It is a network based control system. Available AV control systems may differ by regions.




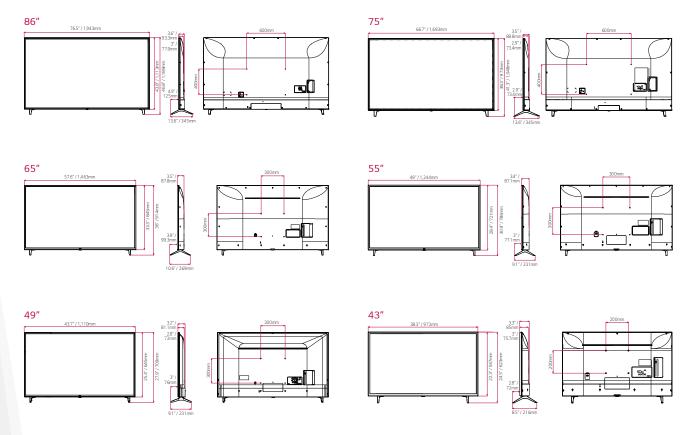


- * Dimensions & Jack Panels (Read/Side) may differ from the above image, so please contact LG sales team to verify before ordering.


 * UTG40S series basically have a two-pole stand, but it is able to detach the stand from the body, per service environment (can be used as a wall-mount unit).


86" | 75"

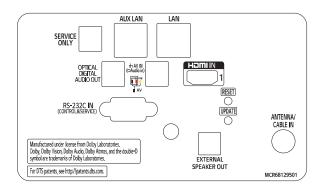



65" | 55" | 49" | 43"

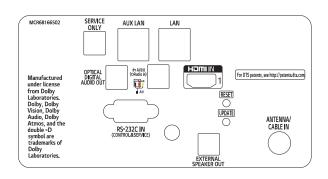

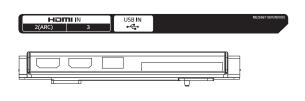

^{*} Dimensions & Jack Panels (Read/Side) may differ from the above image, so please contact LG sales team to verify before ordering.

UT640S	series (NA)	86UT640S	75UT640S	65UT640S	55UT640S	49UT640S	43UT640S	
DESIGN	Stand Type	2 Pole(No-Stand available)	2 Pole(No-Stand available)	2 Pole(No-Stand available)	2 Pole(No-Stand available)	2 Pole(No-Stand available)	2 Pole(No-Stand available)	
	Front Color	Dark Meteo Titan	Dark Meteo Titan	Ceramic Black	Ceramic Black	Ceramic Black	Ceramic Black	
DISPLAY	Inch	86	75	65	55	49	43	
	Resolution	3,840 X 2,160 (UHD)	3,840 X 2,160 (UHD)	3,840 X 2,160 (UHD)	3,840 X 2,160 (UHD)	3,840 X 2,160 (UHD)	3,840 X 2,160 (UHD)	
	Brightness (cd/m²)	315	315	360	360	360	270	
OADCASTING SYSTEM	Digital	ATSC / Clear QAM	ATSC / Clear QAM	ATSC / Clear QAM	ATSC / Clear QAM	ATSC / Clear QAM	ATSC / Clear QAM	
VIDEO	HDR (10 Pro / HLG)	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	
AUDIO	Audio Output	10W + 10W	10W + 10W	10W + 10W	10W + 10W	10W + 10W	10W + 10W	
	Speaker System	2.0 ch	2.0 ch	2.0 ch	2.0 ch	2.0 ch	2.0 ch	
	DOLBY ATMOS	-	-	-	-	-	-	
	One Touch Sound Tuning	-	-	-	-	-	-	
	LG Sound Sync	Bluetooth required	Bluetooth required	Bluetooth required	Bluetooth required	Bluetooth required	Bluetooth required	
JPERSIGN SW COMPABILITY	Content Management Software (CMS), Control and Monitoring Software (Control/Control+), Simple Editor							
SIGNAGE FEATURE	Crestron Connected® (Network Based Control), DPM (Digital Power management), Time scheduler, RTC (Real Time Clock), NTP sync timer, BEACON, Embedded CM (contents manager), Embedded GM (Group manager)							
MART FEATURE	webOS 4.5, Smart Home (Launcher Bar), Web Browser, Pre-loaded App (Youliube only), Soft AP; Wi-Fi (802.11 ac), Screen Share (Miracast), LG TV Plus App Compatibility, DIAL, Bluetooth Audio Playback, LG Sound Sync/bluetooth, Mobile Connection Overlay							
HOSPITALITY FEATURE	Public Display Mode, Lock mode (Limited), Welcome Screen (Splash Image), insert Image, One Channel Map, IP Channel Manager, External Speaker Out. (Int /Fixed, 3.5mm, Stereo, Single ended Type(GND,L+R+), 1W with 80), V-Lan Tag. RIP (remote jack pack) Compatibility (Teleadapt/Guestlink (HDMI CEC)), Moving Picture Playback (SD/HD/Plus HD), Auto Off / Sleep Timer, Smart Energy, Saving, Motion Fye Care							
AINTENANCE FEATURE		USB Cloning, WOL, SNMP, Diagnostics (Self Diagnostics (USB)), Simplink(HDMI-CEC)(1.4), IR Out (RS-232C), Multi IR Code						
JACK INTERFACE	Set Side	Side HDMI in 2(2.0), USB (2.0)						
	Set Rear	HDMI in (HDCP) 2.0, RF in (tuner), AV in (Phone Jack Type). Digital Audio Out (Optical), RS-232C(D-Sub Spin) (Control & Service), R145 (Usage Purpose) 2 (Ethernet, SNMP), External Speaker Out(3.5mm phone jack) (Spik-out 1, 1 W, 80), Debug (Phone Jack Type)						
DIMENSION UNIT : mm / kg)	VESA	600 x 400	600 x 400	300 x 300	300 x 300	300 x 300	200 x 200	
	W x H x D / Weight (with stand)	76.5" x 46.8" x 13.6" / 99.2 lbs 1,943 x 1,188 x 345 / 45.0 kg	66.7" x 41.3" x 13.6" / 78 lbs 1,693 x 1,048 x 345 / 35.4 kg	57.6" x 36" x 10.6" / 47.6 lbs 1,463 x 914 x 269 / 21.6 kg	49" x 31" x 9.1" / 32 lbs 1,244 x 786 x 231 / 14.5 kg	43.7" x 27.9" x 9.1" / 24.9 lbs 1,110 x 709 x 231 / 11.3 kg	38.3" x 24.5" x 8.5" / 17.9 973 x 623 x 216 / 8.1 k	
	WxH(H')xD/Weight(without stand)	76.5" x 46.8" x 3.7" / 97.4 lbs 1,943 x 1,118 x 93.3 / 44.2 kg	667" x 38.5" x 3.5" / 76.3 lbs 1,693 x 978 x 88.8 / 34.6 kg	57.6" x 33.5" x 3.5" / 47 lbs 1,463 x 850 x 87.8 / 21.3 kg	49" x 28.6" x 3.4" / 31.5 1,244 x 726 x 87.1 / 14.3 kg	43.7" x 25.6" x 3.2" / 24.5 lbs 1,110 x 650 x 81.1 / 11.1 kg	38.3" × 22.5" × 3.3" / 17.6 973 × 572 × 85 / 8.0 kg	
	W×H×D/Weight (Shipping)	83.3" x 49.6" x 11.2" / 130.1 lbs 2,116 x 1,261 x 285 / 59.0 kg	72.4" x 43.9" x 9.1" / 100.8 lbs 1,839 x 1,116 x 231 / 45.7 kg	63" x 38.2" x 7.5" / 62.6 lbs 1,600 x 970 x 190 / 28.4 kg	53.5" x 33" x 6.9" / 43 lbs 1,360 x 835 x 175 / 19.5 kg	47" x 30.3" x 6.2" / 29.5 lbs 1,193 x 770 x 158 / 13.4 kg	41.7" x 26" x 6" / 22.5 li 1,060 x 660 x 152 / 10.2	
POWER (UNIT : WATTS)	Voltage, Hz	AC 120 V - 50 / 60 Hz	AC 120 V - 50 / 60 Hz	AC 120 V - 50 / 60 Hz	AC 120 V - 50 / 60 Hz	AC 120 V - 50 / 60 Hz	AC 120 V - 50 / 60 Hz	
	Power Consumption(Typ.)	301W	221W	180.3W	145W	104W	99.1W	
	Stand-by	Under 0.5W	Under 0.5W	Under 0.5W	Under 0.5W	Under 0.5W	Under 0.5W	

^{*} Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.



www.lg.com/b2b
www.youtube.com/c/LGECommercialDisplay
www.facebook.com/LGInformationDisplay
www.linkedin.com/company/LGInformationDisplay



